

VELUX®

SKYLIGHTS & SUN TUNNELS

dream



live



create



BRINGING LIGHT TO LIFE™

VELUX®

VELUX is about how we live

today...tomorrow...forever!

VELUX® is about how we live today, tomorrow, forever. It adapts to the needs of various family members, seasons, occasions and even the spirit of the moment. Whether it's in the privacy of a master bath or in a social area like the kitchen, VELUX makes you feel more alive.

natural light and fresh air

Rooms filled with natural light and fresh air are invariably more beautiful, spacious and uplifting to your spirits. Daylight is the essential element that transforms conventional rooms into splendid spaces that add value and quality to your home and your life.

And then there's the breeze. VELUX skylights and roof windows let you bring the best of the outdoors inside with you.



**Daylight
transforms
conventional
rooms...**



**...into
splendid
spaces**

Why VELUX?

LEAKPROOF



Today, as for over 60 years, VELUX skylights, roof windows and sun tunnels are built to be leakproof. Like water off a duck's back, VELUX flashing systems are designed to shed water without relying on sealants that can break down over time.

QUALITY

- Over the last 60 years VELUX has been the world leader in the roof window and skylight industry.
- VELUX is the preferred brand for American contractors according to every national survey of building industry professionals.
- VELUX holds more than 300 patents in roof window and skylight design.
- The VELUX Promise. When you decide to use VELUX roof windows or skylights, you are assured that our dedication to providing exemplary products and services will not end with the completion of that project. Or the next. We stand behind our products with a promise of lasting service. Our warranty covers 20 years on insulated glass seal, 10 years on the skylight, roof window or Sun Tunnel* and 5 years on blinds, controls and electronics.



*All Sun Tunnels purchased after January 1, 2004.

ENERGY EFFICIENCY

- VELUX is leading the industry by being the only manufacturer with all standard skylights meeting ENERGY STAR® approval guidelines for all climatic regions of the US. By choosing VELUX, you can promote energy efficiency and save money on utility bills – all while making your home brighter and more comfortable.
- VELUX Comfort™ and ComfortPlus™ glazings offer:
 - Three times more protection against solar heat gain.
 - Resists condensation twice as long as clear glass.
 - Protects interiors by reflecting the vast majority of the sun's fade-causing rays (see page 25).



REPLACE THAT OLD BUBBLE

If you have one of those dirty, faded bubble skylights that no longer provides as much light, why not replace it with a VELUX?

Our glass looks beautiful inside and out, provides you with a clear view to the sky, and lets in maximum natural light for years to come.



Why VELUX?

THE COMPLETE SYSTEM

EXTERIOR HEAT CONTROL –

The best protection for heat gain is an exterior awning that stops the heat before it hits the glass and penetrates into the room.

WEATHERTIGHT FLASHINGS –

Leakproof flashings are a must for every skylight. That is why we have been offering prefabricated VELUX flashing systems for most roof materials for more than 50 years.

COMFORT GLAZING –

Comfort glazing is standard in all VELUX skylights. Comfort glazing allows you comfort on hot summer days and on cold winter nights.

SKYLIGHTS AND ROOF WINDOWS – VELUX offers a wide assortment of skylights and roof windows to meet any need – light and ventilation, roof construction, roof material, roof pitch or ceiling type.

INTERIOR LIGHT CONTROL – A huge assortment of blinds and shades are available to meet any needs you may have to diffuse, adjust or block out the light in your room. The blinds will also save you money on your energy bill.

CONVENIENT CONTROLS – Convenient control of the skylight and blinds, and a convenient integration of the functions are available in our manual telescopic rods and in our electric infrared remote controlled systems.


THE COMPLETE SYSTEM – The complete system for optimizing your Enlightened Spaces is available for you in the VELUX product program. Take advantage of our 60 years of experience and the solutions we offer for controlling natural light and fresh air.




Product Selection

VELUX offers a complete range of daylighting products to bring the many benefits of natural light into your home in almost any application.

SKYLIGHTS

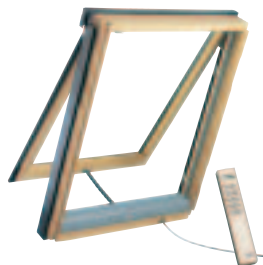

ROOF WINDOWS




SUN TUNNELS



Sun Tunnels for when a view to the world is not needed such as closets, laundry rooms, hallways and second baths.

Roof Windows for in-reach applications requiring egress, such as finished attics.

Skylights for overhead, out-of-reach applications or with in-reach applications where egress is not required.

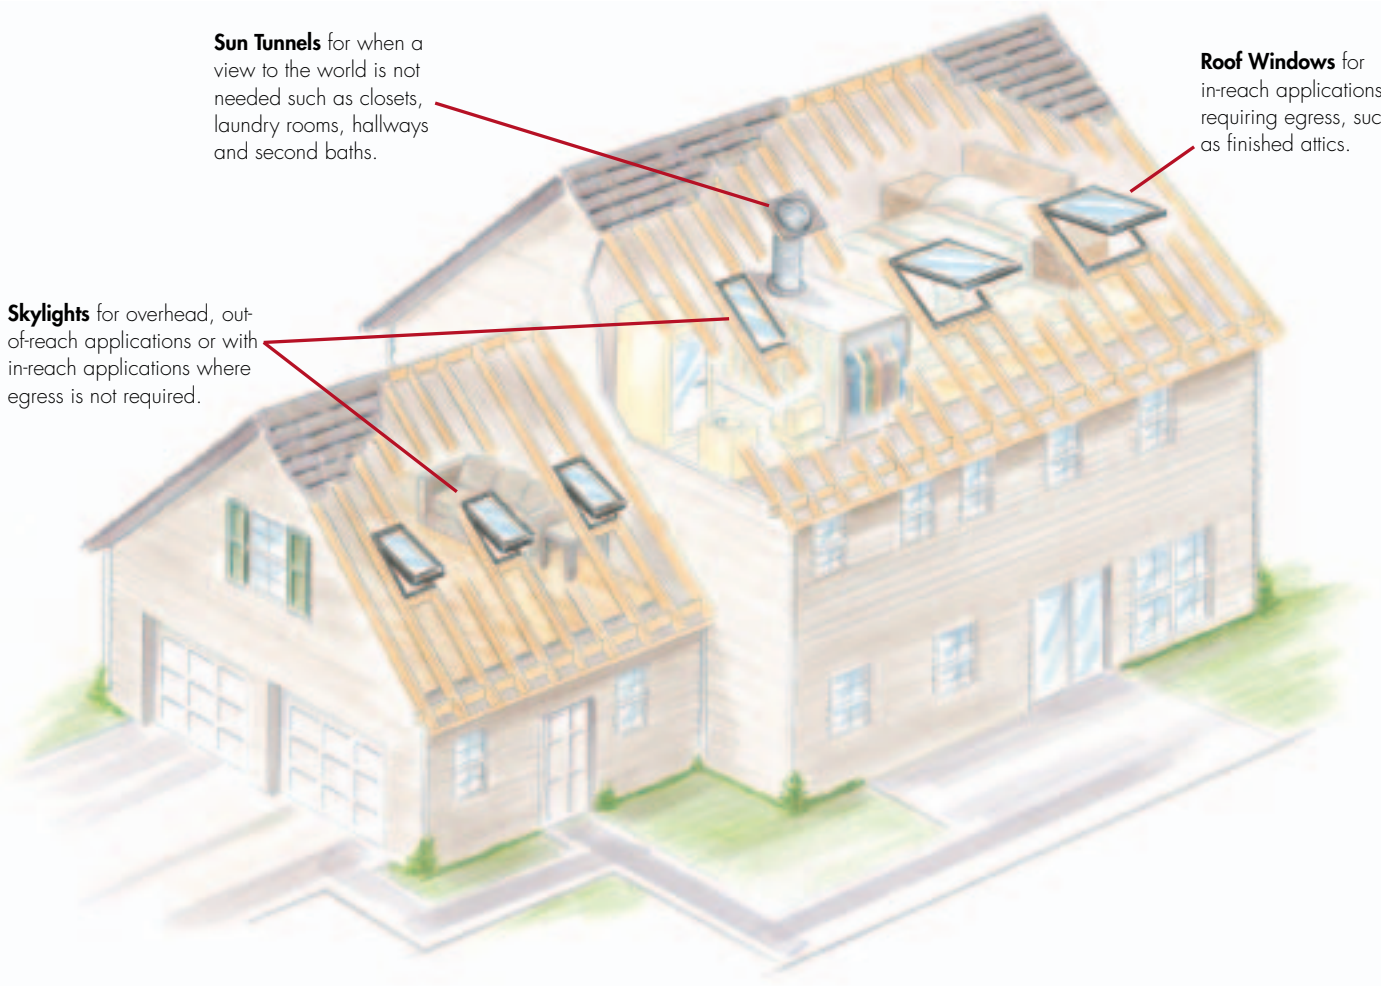


How to Choose

With VELUX, you have several choices, no matter how your house and roof are constructed. Before getting started and to help you make the best possible choice for your application, read the following steps:

1 CHECK YOUR ROOF PITCH

For VELUX deck mounted skylights, the roof pitch must be between 15 and 85 degrees. If the roof pitch is below 15 degrees, the VELUX flat roof curbs can raise the pitch from 0 degrees to the required minimum. For VELUX self-flashed skylights, curb mounted skylights and sun tunnels, the roof pitch must be between 15 and 60 degrees. For roof windows GPL and GDL, see page 21.



2 CHOOSE THE BEST SKYLIGHT, ROOF WINDOW OR SUN TUNNEL FOR YOUR APPLICATION

ELECTRIC VENTING SKYLIGHT (VSE or QVE)

For applications above 15 feet and in rooms that need natural ventilation (especially kitchens and baths), use the electric venting skylight and electrical blinds.

MANUAL VENTING SKYLIGHT (VS or QVM)

For applications out of reach but still in a room that needs natural ventilation and where a manual operation is okay, the venting skylight will be the best choice. Choose one of the manual blinds and a rod to operate the skylight and blind.

FIXED SKYLIGHT WITH VENTILATION FLAP (FSF)

For applications with only limited need for ventilation, the fixed skylight with a ventilation flap will be a good choice. Choose electrical blinds for optimal light control or a manual blind and a rod for operating the flap and the blind.

FIXED SKYLIGHT (FS or QFS)

For applications where ventilation is not needed, our fixed skylight will be the most cost efficient choice. Choose electrical blinds for optimal light control or a manual blind and a rod.

FIXED CURB MOUNTED SKYLIGHT (FCM)

For replacing old curb mounted bubbles, use the FCM and the cellular blind for optimal energy control. Remember the rod for operating the blind.

ROOF WINDOW (GPL or GDL)

If you can reach the window, our top-hung roof window GPL will be the best choice, or even better, the roof balcony GDL will dramatically change the room. Manual blinds will be the best choice.

SUN TUNNELS (TSF, TTF, TSR or TTR)

Perfect for second baths, closets, halls and stairwells where a view to the outside is not a requirement or a skylight shaft length would be over 4 feet.



How to Choose

3 SELECT THE CORRECT SIZE

Here you have to choose between one large skylight or several smaller ones. Often it would be a good idea to look at the construction of the roof.





VELUX has five sizes that fit perfectly in between the trusses. If a wider skylight is required, combine two skylights close together.

VELUX offers seven sizes that are ideal for 16" on-center rafters which can generally be cut to accommodate preferred placement.



4 SELECT YOUR CEILING STYLE

Also consider how the skylight will finish out from the inside. You have several possibilities to enhance the room with natural light.

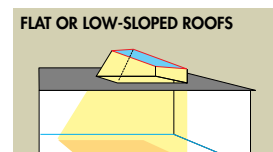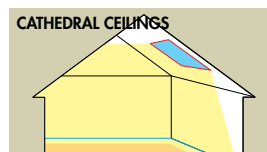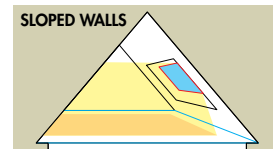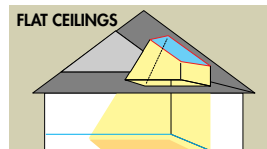

Need an Installer?

There are many qualified installers of VELUX skylights, roof windows, sun tunnels and blinds and controls. To find an installer in your area, please contact your local Home Builders Association, your VELUX dealer or VELUX Solutions.

VELUX SOLUTIONS

In an effort to further assist homeowners in locating highly qualified skylight, roof window and sun tunnel installers, VELUX Solutions has begun a certification program of local independent installers. A VELUX Solutions Certified Installer is:

- Carefully screened by VELUX America Inc.
- Required to complete an extensive training program.
- Required to be in the construction industry for a minimum of 5 years.
- Licensed and insured.

Our installers offer guaranteed installation. To find out if VELUX Solutions installation service is available in your area, call VELUX Solutions at 1-866-358-3589 or visit www.VELUXsolutions.com or www.VELUXusa.com. Not available in all areas.

Kitchens are places we gather, cook, study, and share time with our friends and families.



Electric Venting Skylight

- Opens and closes quickly and quietly from anywhere in the room.
- Comes with a pre-installed concealed motor, control system and two rain sensors.
- Pre-wired for one interior and one exterior sunscreening accessory (see pages 24-26).
- Installs using a single hard wire that connects into a standard junction box.
- Impact glass available for hurricane prone areas.
- Wall mounted keypad (WLI 160) and interface to home automatic systems (WVF 111) are optional.



DECK MOUNTED Model VSE™

For roof pitches from 15° to 85°



SELF-FLASHED Model QVE

For roof pitches from 15° to 60°



FLASHING SOLD SEPARATELY

FLASHING INTEGRATED (for asphalt shingles only)




REMOTE CONTROL INCLUDED

This slimline remote can operate multiple skylights and sunscreening blinds. Programmable to close the electric venting skylights after a set time period.




Models VSE and QVE

AVAILABLE SIZES: FOR TRUSSES 24" ON CENTER

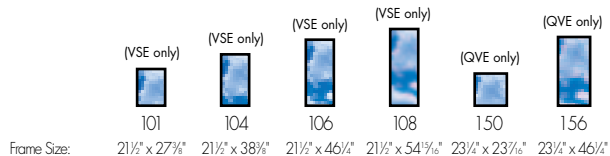

AVAILABLE SIZES: FOR RAFTERS 16" ON CENTER

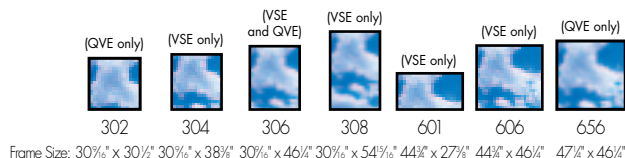

www.VELUXusa.com

Did You Know?

Bright light regulates the suprachiasmatic nucleus clock – known by most as our body's internal clock. This clock keeps our bodies set to the correct time.

A bathroom can be your personal oasis, your escape from the pressure and stress of everyday life.



Manual Venting Skylight

- Easily opened and closed manually with VELUX control rods when out of reach.
- Smooth-turning handle is available when the skylight is installed within reach.
- Blinds and rods are available (see pages 24-27).
- Choice of Comfort™ or ComfortPlus™ insulated glass.
- Impact glass available for hurricane prone areas.
- Manual to electric conversion kit available (WCM 140).



DECK MOUNTED Model VS®

For roof pitches from 15° to 85°



FLASHING SOLD SEPARATELY

SELF-FLASHED Model QVM

For roof pitches from 15° to 60°




FLASHING INTEGRATED
(for asphalt shingles only)

CONTROL ROD SOLD SEPARATELY




Models VS and QVM

AVAILABLE SIZES: FOR TRUSSES 24" ON CENTER

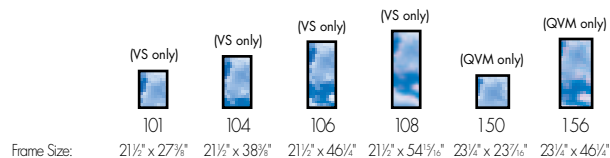

AVAILABLE SIZES: FOR RAFTERS 16" ON CENTER

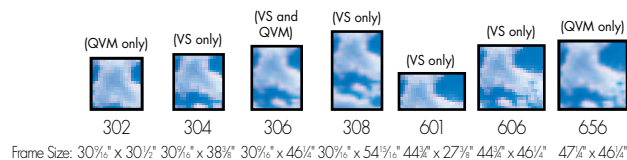

www.VELUXusa.com

Did You Know?

American homeowners said if they had a choice of accessories for the ultimate dream bathroom, number one on the list would be a skylight to bathe the bathroom with more natural light.

As you sit and relax in your armchair, you gaze toward the heavens and all your troubles fade away.

VELUX®

Fixed Skylight

- Captures daylight for rooms in which maximum lighting is the only requirement.
- Streamlined exterior – smooth, low profile does not obstruct your roofline.
- Blinds and controls are available (see pages 24-27).
- Choice of Comfort™ or ComfortPlus™ insulated glass.
- Impact glass available for hurricane prone areas.



DECK MOUNTED Model FS®

For roof pitches from 15° to 85°



SELF-FLASHED Model QFS

For roof pitches from 15° to 60°




FLASHING SOLD SEPARATELY

FLASHING INTEGRATED
(for asphalt shingles only)




Models FS and QFS

AVAILABLE SIZES: FOR TRUSSES 24" ON CENTER

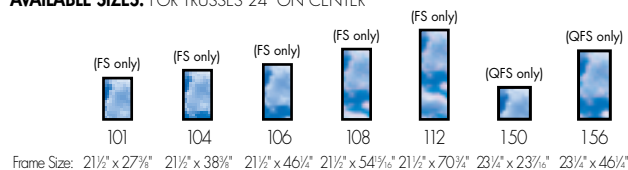

AVAILABLE SIZES: FOR RAFTERS 16" ON CENTER

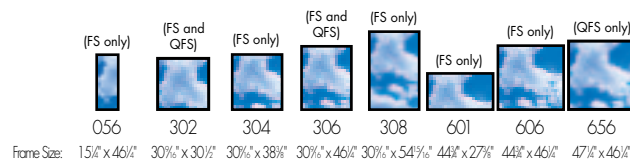

www.VELUXusa.com

Did You Know?

20% of our population suffer varying degrees of Seasonal Affective Disorder (SAD). Individuals with SAD may experience emotional depression, a drop in physical energy, an increased appetite, and an increased need for sleep. Lack of sufficient daylight is directly linked to SAD.

Transform your bonus room into a "Modern Playground" – a room that gives your kids a dose of medicine that daylight and fresh air have to offer.




Did You Know?

Students perform significantly better in environments that are lit with natural, rather than artificial, light. The study, one of the largest of its kind, tracked test scores for 21,000 students in California, Colorado and Washington. Researchers report that learning rates were 26 percent higher in reading and 20 percent higher in math in rooms with the most natural light.

Fixed Skylight

CURB MOUNTED Model FCM™

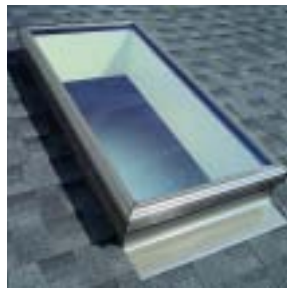

- No designated top, bottom, or sides, so you can install it in whatever direction you want.
- Maintenance-free exterior.
- Integrated gasket provides a thermal break for energy efficiency and seals out water, wind and hassles for years.
- Impact glass available for hurricane prone areas.
- Blinds and controls are available (see pages 24-27).



For roof pitches from 15° to 60°

Model FCM

FLASHING SOLD SEPARATELY

Wide range of custom sizes available.


AVAILABLE SIZES:

FOR TRUSSES 24" ON CENTER



AVAILABLE SIZES:

FOR RAFTERS 16" ON CENTER

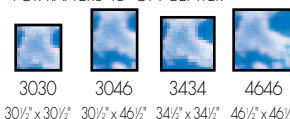

Fixed Skylight with Ventilation Flap

DECK MOUNTED Model FSF®

For roof pitches from 15° to 85°




- Features ventilation flap to allow air to circulate.
- Streamlined exterior – smooth, low profile does not obstruct your roofline.
- Blinds and controls are available (see pages 24-27).
- Available with ComfortPlus™ insulated glass only.



FLASHING SOLD SEPARATELY

AVAILABLE SIZES: FOR TRUSSES 24" ON CENTER

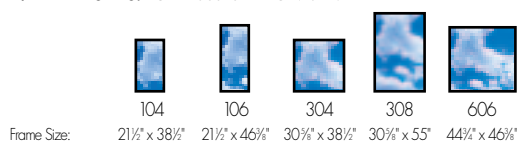

www.VELUXusa.com


An attic's sloped ceilings and angular walls are the perfect backdrop from which to create light-filled, spacious rooms under the eaves.



Top Hinged Roof Window


DECK MOUNTED Model GPL™

For roof pitches from 20° to 55°

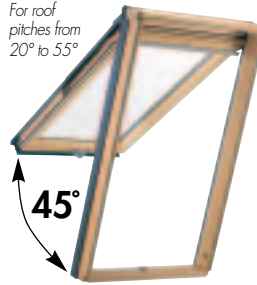

FLASHING SOLD SEPARATELY

GPL AVAILABLE SIZES:



M08

S06

Frame Size: 30 3/4" x 55" 44 3/4" x 46 3/4"

- When the roof window is closed, a ventilation flap can be opened.
- Comes with a select wood frame and sash coated with a clear finish.
- Opens to a 45° angle to satisfy Egress requirements for emergency escape.
- Sash rotates completely inward for easy glass cleaning from inside.
- Optional insect screen and blinds are also available (see pages 24-26).
- Available with laminated insulated glass only.


Optional insect screen available



Balcony Roof Window

DECK MOUNTED Model GDL™

For roof pitches from 35° to 53°

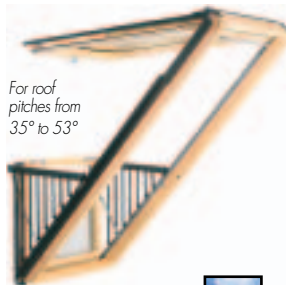

GDL AVAILABLE SIZE:



P19

Frame Size: 37 1/8" x 99 1/4"

- Features an exclusive dual-sash operation:
 - The top sash opens for maximum ventilation and also pivots inward for easy glass cleaning from inside the room.
 - The bottom sash opens outward to actually create a roof balcony.
- When the CABRIO is closed, a ventilation flap allows fresh air to circulate.
- Durably constructed with select wood frame and sashes coated with a clear protective finish.
- Blinds are also available (see pages 24-26).
- Available with laminated insulated glass only.

FLASHING SOLD SEPARATELY

Did You Know?

Finished attics and bonus rooms typically appraise at 100% of the value of the rest of your living space while basements typically do not.

VELUX Flashing Systems

SHINGLE/SHAKE STEP FLASHING TYPE EDL®



- For use with thin roofing materials such as asphalt or fiberglass shingles, slate, cedar shingles and shakes.*
- Each piece of step flashing is interwoven with a layer of roofing material for proper water drainage.
- Designed for roof pitches from 15° (3/12) to 85°.


* Additional step pieces (ZZZ) 165 required for shakes and other thick roofing material.

HIGH PROFILE ROOF FLASHING TYPE EDW™/EDH




- For use with high profile roofing materials such as concrete and Spanish tile.
- The patented sill flashing piece features pliable pleats that can be easily formed to most types and heights of tile.
- Side and head flashing pieces form a gutter which directs water away from the skylight and off the roof.
- Designed for roof pitches from 15° (3/12) to 85°.

METAL ROOF FLASHING TYPE EDM™



- Flashing pieces interlock directly with the roofing material for a fast, weathertight installation and streamlined exterior.
- A sill apron features pliable pleats that form to the roof.
- Designed for roof pitches from 15° (3/12) to 85°.

STEP FLASHING TYPE ECL



- Curb mounted skylights, such as the VELUX FCM.
- 2x6 or 2x4 site-built curbs made to standard dimensions.
- Shingles or other low-profile roofing materials on roof pitches from 15° (3/12) to 60°.

ROOF CURBS FOR LOW-SLOPED ROOFS TYPE ECX®/EMX™



- Prefabricated roof curbs provide the proper pitch necessary for VELUX skylight installations on flat or low-sloped roofs.
- Factory-applied insulation increases energy efficiency.
- Type ECX roof curb is required for roof pitches from 0° to 10° (2/12).
- Type EMX roof curb is required for roof pitches from 10° (2/12) to 15° (3/12).

The Clear Choice

GLASS VS. PLASTIC



Glass, particularly the Comfort™ glass used in all VELUX skylights, is superior to plastic in every respect. It is:


- More energy efficient.
- More durable.
- Reduces external noises.
- Won't discolor, leak, or allow drafts.

IMPACT GLASS

This specially designed impact model meets the requirements for wind-borne debris protection of the IBC (International Building Code, Commercial), IRC (International Residential Code), and the Florida Building Code 2001. Tested in accordance with the referenced ASTM standards, ASTM E-1886 and ASTM E-1996-02. *Call for price and availability on models and sizes that meet impact codes for hurricane prone areas.*



VELUX Glass Options

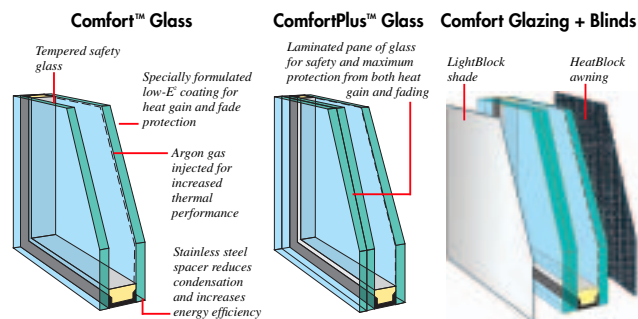

With the use of the complete system, you will be able to control the light and heat gain to the level where you are comfortable.

PROTECTS AGAINST HEAT GAIN

VELUX Comfort glass lets in most of the light and blocks out most of the heat.

RESISTS CONDENSATION

A home can have up to 50% more humidity before condensation will occur.

PROTECTS AGAINST FADING

Comfort glass controls up to 83% of the sun's fading rays, including 99% of UV rays.

Exterior HeatBlock and controls for blinds – see next page

Blinds (Interior)

CELLULAR SHADE



VENETIAN BLIND



LIGHTBLOCK™ SHADE



Control the Light in Your Room

DIFFUSE THE LIGHT

- Increases energy efficiency up to **16%**.
- Diffuse the light.
- Manual or electric. Manual only for curb mount.



Translucent white

ADJUST THE LIGHT


- Optimal glare and light control to direct the light where you want.
- Increase energy efficiency up to **12%**.
- Manual or electric.
- Available for older roof windows and skylights.



White aluminum with **Thermo** coating on reverse

BLOCK THE LIGHT

- Perfect for room darkening.
- Increase energy efficiency up to **20%**.
- Electric only for skylights. Manual only for roof windows.

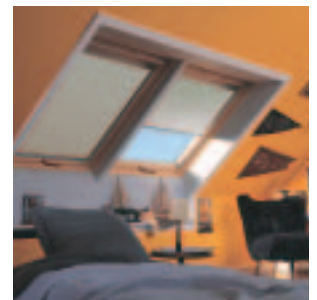

White with **Thermo** coating on reverse

Blinds (Exterior) Control the Heat Gain

HEATBLOCK™ AWNING




- Fits electric and manual venting skylights and fixed skylights.
- Net cloth allows view to the exterior (deck and self). Light blocking black cloth for curb.
- Electric only.
- Best possible control of the heat gain; reduce the solar heat gain up to **40%** more than the already energy efficient Comfort glazing.

Charcoal net cloth



Solid black for curb

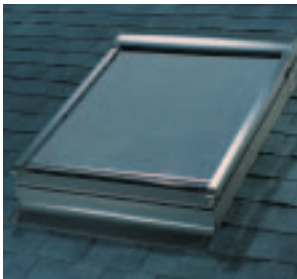

Controls Electric and Manual Operation

ELECTRIC CONTROL OF BLINDS

The venting electric skylight (VSE) has the control box and remote included. Additional keypads or remotes can be added.

POWER SUPPLY WLC 160

- One control box powers up to three shades or blinds.
- If you have more than three blinds, several boxes can be connected.

KEYPAD WLI 160

- Each of the three switches can operate one shade or blind.
- Systems can be linked for simultaneous control of multiple systems from one keypad.

REMOTE WLR 160

- Used in conjunction with the keypad WLI 160, this slimline remote utilizes infrared technology to operate electric shades or blinds from anywhere in the room.

SENSOR INTERFACE WLF 111

- Sensor interface for VSE and WLC enables skylights and electric blinds and shades to be controlled by non-VELUX sensors and home automation systems. One sensor interface can control up to 30 electric skylights or electric shades and can support up to three different sensors.



POWER SUPPLY AND KEYPAD KES 160

- Power supply and keypad to operate one electric blind or shade.



MANUAL CONTROL OF WINDOWS AND BLINDS

SKYLIGHT HANDLE ZZZ 169

Optional handles are available to operate VS and QVM manual venting skylights in within-reach applications.



MANUAL ROD ZCT 300

6' to 10' manual rod operates venting skylights and manual blinds.



MANUAL ROD ZST 300

Manual rod operates cellular shade for curb mounted skylight only.



MOTORIZED ROD ZMT 300

6' to 10' rechargeable, battery-operated rod that operates manual venting skylights and manual blinds.



ROD EXTENSION ZCT 100

3' extension fits the ZMT 300 and ZCT 300.



Open your home to the beauty of natural light. The Sun Tunnel is the easiest, most affordable way to add style, beauty and value to your home.



14" and 22" Flexible Sun Tunnel®

Can be installed quickly around attic obstructions, making it the easiest tubular product to install in the industry.

DOME

- Low profile dome design parallels slope of roof for attractive appearance.

DUAL DIFFUSER

- Dual system reduces chance of condensation.
- Even light distribution without hotspots.

FLASHING SYSTEM

- One-piece design fits shingle/shake roofs. Tile flashing is available as a special order item.
- 24 gauge Zincalume metal flashing with vertical collar.
- 3 to 4 times more weather resistant.
- Baked-on enamel finish.

CEILING FRAME

- Flush mount white ceiling ring with matching caps to hide fasteners.

Impact models available for hurricane prone areas.



OPTIONAL LIGHT KIT AVAILABLE

(ZTL 100 Electric Light Kit)


Allow your sun tunnel to be a source of illumination at night. Installs in minutes inside the tunnel just above the diffuser.

FLEXIBLE Models TSF and TTF



FLASHING INCLUDED

AVAILABLE SIZES:
For shingle/shake roofs




Outside Flashing: 27½" x 31½" 33½" x 35½"

- 14" diameter for 16" center framing and 22" diameter for 24" center framing.
- 8' of tunnel included in standard kit for TSF/TTF 014 and 6' of tunnel included in standard kit for TSF/TTF 022.
- Additional tunnel sold separately for TSF/TTF 022. (Max. recommended length is 8' for 014 and 12' for 022).

For roof pitches from 15° to 60°



For tile roofs



Outside Flashing: 25½" x 37" 31½" x 40½"

www.VELUXusa.com

Ideal for smaller rooms such as closets, hallways, laundry rooms and second baths. You can now add natural light to places you thought were impossible.

VELUX®

10" and 14" Rigid Sun Tunnel®

Perfect for installation which requires longer tunnel length or an installation with a Northern exposure. The dual adjustable elbows offer easy alignment.



DOME

- Low profile dome design parallels slope of roof for attractive appearance.

DUAL DIFFUSER (TSR/TTR 014)

- Dual system reduces chance of condensation.
- Even light distribution without hotspots.

FLASHING SYSTEM

- One-piece design fits shingle/shake roofs. Tile flashing is available as a special order item (not available for TSR 010).
- 24 gauge Zincolume metal flashing with vertical collar.
- 3 to 4 times more weather resistant.
- Baked-on enamel finish.

CEILING FRAME

- Flush mount white ceiling ring with matching caps to hide fasteners.

OPTIONAL LIGHT KIT AVAILABLE

(ZTL 100 Electric Light Kit)
Allow your sun tunnel to be a source of illumination at night. Installs in minutes inside the tunnel just above the diffuser. (Not available for TSR 010)

Impact models available for hurricane prone areas (TSR/TTR 014).

RIGID Models TSR and TTR



- 10" and 14" diameter for 16" center framing.
- Standard kit will span 43" with straight run.
- Additional tunnel sold separately.
(Max. recommended length is 14' for 010 and 18' for 014).

FLASHING INCLUDED

For roof pitches from 15° to 60°



AVAILABLE SIZES:
 For shingle/shake roofs

For tile roofs



010

014

014

Outside Flashing: 22" x 23"

27½" x 31½"

Outside Flashing:

25½" x 37"

www.VELUXusa.com

www.VELUXusa.com

For more information about VELUX skylights, roof windows and Sun Tunnels, please visit our web site at **www.VELUXusa.com** for the following information and more:

- Inspiration and Ideas Guide
- Interactive Skylight Selection Tool
- Detailed Product Information
- Full Line of Blinds and Controls
- How to Install
- Frequently Asked Questions

Or call us at 1-800-888-3589.



VELUX®

VELUX America Inc.
450 Old Brickyard Road
PO Box 5001
Greenwood, SC 29648-5001
Phone: 1-800-888-3589
Fax: 1-864-943-2631
Internet: <http://www.VELUXusa.com>

VUSA-1612-0804

©2004 VELUX GROUP

® VELUX, VELUX logo, FSF, FS, VS, EDL, ECX, Sun Tunnel, Combi-Flashing are registered trademarks.

™ GPL, GHL, CABRIO, EDW, EDM, EMX, FCM, VSE, BRINGING LIGHT TO LIFE, Comfort, ComfortPlus, HeatBlock, LightBlock are trademarks of VELUX GROUP.

Printed in U.S.A.